

Inferring Fences in a Concurrent Program Using SC proof of Correctness

Chinmay Narayan, Shibashis Guha, S.Arun-Kumar

Indian Institute of Technology Delhi

Abstract. Most proof systems for concurrent programs [Jon83] [O’H07] [VP07] assume the underlying memory model to be sequentially consistent(SC), an assumption which does not hold for modern multicore processors. These processors, for performance reasons, implement relaxed memory models. As a result of this relaxation a program, proved correct on the SC memory model, might execute incorrectly. To ensure its correctness under relaxation, **fence** instructions are inserted in the code. In this paper we show that the SC proof of correctness of an algorithm, carried out in the proof system of [Sou84], identifies per-thread instruction orderings *sufficient* for this SC proof. Further, to correctly execute this algorithm on an underlying relaxed memory model it is sufficient to respect only these orderings by inserting **fence** instructions.

1 Introduction

The memory model of a processor defines the order in which memory operations, issued by a single processor, appear to execute from the point of view of the memory subsystem. In a broad sense, it determines whether any two memory access instructions issued by a processor within a single thread can be reordered. Sequentially Consistent memory model (SC) is the simplest but most restrictive of all and does not allow any reordering of instructions within a thread. Modern multicore processors, for the purpose of hiding latencies, implement relaxed memory models and allow instructions within a thread to be reordered as long as they operate on different memory addresses. For example, Total Store Order (TSO), the memory model for x86 processors, allows write instructions to get reordered with later reads provided they operate on different memory locations. As a result of these relaxations, a program may exhibit more behaviours than under SC and it is possible that some of these extra behaviours do not satisfy the property which holds under SC. Peterson’s mutual exclusion algorithm, in Figure 1 illustrates this behaviour. This algorithm satisfies mutual exclusion property under the SC model but executing it on an Intel’s x86 processor might result in the violation of this property. This can happen if the read of $flag_2$ at label 3 is reordered before instructions at label 1 and label 2. With such reordering $Proc_1$ can enter the critical section. $Proc_2$, with or without this reordering, can also enter the critical section simultaneously. This example clearly shows the effect of memory model on the correctness of an algorithm.

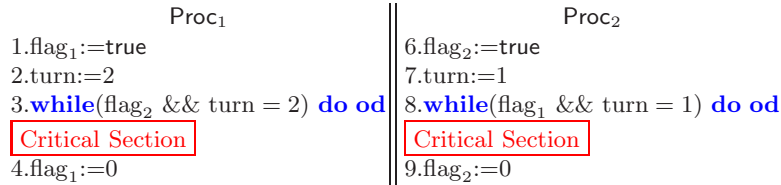


Fig. 1. Peterson’s mutual exclusion algorithm

It is clear that this problem appeared because of an extra execution generated due to instructions’ reordering which was not possible under the SC memory model. This problem also does not appear for a data race free program *if* the underlying relaxed memory model satisfies data-race freedom (DRF) property. It can be shown that any data race free program when executed on a memory model satisfying DRF exhibits exactly the same set of behaviours as under the SC memory model. A program is *data race free* if in every execution of this program any pair of an conflicting instructions ($w-w$ or $w-r$) by two different threads to the same variable are separated by an unlock instruction. Therefore a *data race free* and a *correct* program under SC is guaranteed to execute correctly on a memory model which satisfies DRF property. However, the algorithms that we are interested in (lock-free, wait-free, lock implementations) do not use lock/unlock and hence do not fit under this definition of *data race freedom*. Therefore, their correctness under a relaxed memory model does not follow from their correctness under the SC memory model.

Another way to avoid extra executions is to prevent certain reorderings by putting a special instruction, **fence**, after every instruction in each thread. A **fence** instruction when placed between any two instructions in a thread prohibits their reordering. Execution of a fully fenced program (**fence** after every instruction in a thread) on a relaxed memory model generates exactly the same set of executions as under SC and therefore the correctness under SC implies the correctness under relaxed memory model. However, this trivial placement strategy would negate the performance benefits associated with relaxed memory models. Therefore, an ideal placement of **fence** instructions should preserve only those program orders which are *sufficient* to prove the correctness of the properties of interest.

In this paper, we deal with parallel programs which satisfy some property under SC but are not race-free. The main contribution of this paper is to show that the proof of correctness of these programs under SC is useful in identifying per-thread instruction orderings sufficient to make this program correct on a relaxed memory model. Further, locations of **fence** instructions can be inferred based on these orderings and the underlying memory model. We are not aware of any other attempt to use the SC proof of correctness for *fence inference* in a concurrent program.

2 Related Work

All existing approaches for inferring fences for relaxed memory models can be divided into two main categories; model checking based approaches [HR07] [KVY11] [LW11] [AAC⁺12b] and proof system based approaches [Rid10] [Bor12] [BD12]. Model checking based approaches first explore the state space of a program under a given memory model using buffer based operational semantics and check the reachability of erroneous states. Once a reachable erroneous state is identified, the path leading to this state is restricted by inserting fences at appropriate places. [ABBM12] and [ABBM10] showed that the state reachability problem for TSO and PSO memory models is decidable for finite state programs. Further, this problem becomes undecidable as soon as the *read after write* reordering is added to the memory model. This approach, by its nature, is better suited to programs with finite data domains. We are aware of only one line of work [AAC⁺12a] which combines predicate abstraction and model checking based approach to verify and correct infinite data domain programs like Lamport’s bakery algorithm.

The second approach is to use a memory model specific proof system as done in [Rid10]. [Rid10] presents a separation logic based proof system for the TSO memory model and shows that Simpson’s 4 slot algorithm does not satisfy the interference freedom property. Recently [Bor12] and [BD12] looked at the use of separation logic derived proof system for verifying concurrent data structures on POWER/ARM based memory models. These memory models are more complex than the TSO or the PSO memory model mainly because of non-atomic writes. Unlike the approaches of [Rid10], [Bor12] and [BD12], we do not propose a memory model specific proof system but only look at the proof of correctness under SC memory model and use it to infer *sufficient* orderings required for the correctness. Unlike model checking approaches, proof system based approaches can cover more than just reachability. This is evident in the example of Simpson’s 4 slot algorithm where apart from the interference freedom we also prove that the sequence of values observed by the reader are consistent, i.e. they form a stuttering sequence of the values written by the writer. We are not aware of any line of work which handled the fence inference in Simpson’s 4 slot algorithm under PSO memory model with respect to the interference freedom and the consistent reads properties.

3 Language: Syntax and Semantics

Figure 2 shows the syntax of a simple parallel programming language without the support of dynamic thread creation. Operator `||` is used to compose a finite number of programs in parallel. We explicitly distinguish local variables, ranged over by `ℓvar` and accessed only within a thread, and shared variables, ranged over by `shvar` and accessed by more than one thread. A local expression, ranged over by `ℓexp`, is constructed using only local variables, values and operators. A shared expression, ranged over by `shexp`, is constructed from *exactly one* shared variable, another local expression and operators. Assignment command only allows

```

Program = Cmd; end
  Cmd = shvar:=lexp | lvar:=lexp | lvar:=shexp | Cmd1; Cmd2 | Program1 || ... || Programn
      | if lexp then Cmd1 else Cmd2 | while lexp do Cmd od | skip | fence
shexp = shvar | shvar ⊕ lexp
lexp = lvar | lexp ⊕ lexp | val
val = ℕ | ℬ | ℤ
⊕ = + | - | × | ÷

```

Fig. 2. A simple concurrent programming language with barrier support

assigning a local expression to a local variable, a shared expression to a local variable or a local expression to a shared variable. Assignment of a shared expression to a shared variable can be broken down into assignments of one of the above forms. Because of this restriction every assignment command either reads at most one shared variable or writes to at most one shared variable but not both. This guarantees at most one memory load or store event per assignment expression which is helpful in reasoning about memory model and associated events.

3.1 SC Semantics

Figure 3 shows the semantics of this language under SC. A state or configuration under SC is of the form $(\mathcal{G}, \text{Tstore})$ where

$$\mathcal{G} \stackrel{def}{=} \text{shvar} \rightarrow \text{val}, \quad \text{Tstore} \stackrel{def}{=} \text{Tid} \rightarrow \mathcal{L} \times \text{Program}, \quad \mathcal{L} \stackrel{def}{=} \ell\text{var} \rightarrow \text{val}$$

Local store \mathcal{L} and global store \mathcal{G} maps local and shared variables respectively to their values. Each thread is represented by a unique thread id. Thread store maps a thread id to its local store and the program to be executed next. In our operational semantics we use the set representation of this function, i.e Tstore as a set of tuples of the form (t, \mathcal{L}, C) . Function $\llbracket - \rrbracket_{\mathcal{G}, \mathcal{L}} \in \text{exp} \rightarrow \mathcal{G} \rightarrow \mathcal{L} \rightarrow \text{val}$ such that

$$\llbracket \text{shvar} \rrbracket_{\mathcal{G}, \mathcal{L}} = \mathcal{G}(\text{shvar}), \quad \llbracket \ell\text{var} \rrbracket_{\mathcal{G}, \mathcal{L}} = \mathcal{L}(\ell\text{var}), \quad \llbracket e_1 \oplus e_2 \rrbracket_{\mathcal{G}, \mathcal{L}} = \llbracket e_1 \rrbracket_{\mathcal{G}, \mathcal{L}} \oplus \llbracket e_2 \rrbracket_{\mathcal{G}, \mathcal{L}}$$

takes an expression and evaluates it to a value based on the mapping of variables in global store \mathcal{G} and thread local store \mathcal{L} . This function is then used to define reference semantics in Figure 3. For any function $\mathcal{F} : A \rightarrow B$, $a' \in A, b' \in B$, we write $\mathcal{F}[a' := b']$ to denote a function which is same as \mathcal{F} everywhere except at a' where it evaluates to b' . Semantic rules corresponding to the conditional and the looping constructs (ITE-T, ITE-F, WHL-T, WHL-F), local variable's read write (LRW) and global variable's read write (GR, GW) are quite straightforward. In the parallel composition command, the parent thread stops its execution and

$$\begin{array}{c}
\frac{C = \text{shvar} := \ell\text{exp}; C' \quad \llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = v \quad \mathcal{G}' = \mathcal{G}[\text{shvar} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}', \{(t, \mathcal{L}, C')\} \cup T)} \text{ (GW)} \\
\frac{C = \ell\text{var} := \ell\text{exp}; C' \quad \llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = v \quad \mathcal{L}' = \mathcal{L}[\ell\text{var} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}', C')\} \cup T)} \text{ (LRW)} \\
\frac{C = \text{join}(\ell\text{var}); C' \quad \llbracket \ell\text{var} \rrbracket_{\mathcal{G}, \mathcal{L}} = t' \in \text{Tid} \quad t' \notin \text{dom}(T) \cup \{t\}}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, C')\} \cup T)} \text{ (JOIN)} \\
\frac{\llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = \text{true} \quad C = \text{if } \ell\text{exp} \text{ then } \text{Cmd}_1 \text{ else } \text{Cmd}_2; C'}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, \text{Cmd}_1; C')\} \cup T)} \text{ (ITE-T)} \\
\frac{\llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = \text{true} \quad C = \text{while } \ell\text{exp} \text{ do } \text{Cmd} \text{ od}; C'}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, \text{Cmd}; C')\} \cup T)} \text{ (WHL-T)} \\
\frac{C = \ell\text{var} := \text{shexp}; C' \quad \llbracket \text{shexp} \rrbracket_{\mathcal{G}, \mathcal{L}} = v \quad \mathcal{L}' = \mathcal{L}[\ell\text{var} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}', C')\} \cup T)} \text{ (GR)} \\
\frac{C = \text{end}}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, T)} \text{ (END)} \\
\frac{C \in \{\text{skip}; C', \text{fence}; C'\}}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, C')\} \cup T)} \text{ (SKP-SYC)} \\
\frac{\llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = \text{false} \quad C = \text{if } \ell\text{exp} \text{ then } \text{Cmd}_1 \text{ else } \text{Cmd}_2; C'}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, \text{Cmd}_2; C')\} \cup T)} \text{ (ITE-F)} \\
\frac{\llbracket \ell\text{exp} \rrbracket_{\mathcal{G}, \mathcal{L}} = \text{false} \quad C = \text{while } \ell\text{exp} \text{ do } \text{Cmd} \text{ od}; C'}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, C')\} \cup T)} \text{ (WHL-F)} \\
\frac{T' = T \cup \{\{(t_1, \emptyset, \text{Program}_1)\}, \dots, \{(t_n, \emptyset, \text{Program}_n)\}\} \quad t_1, \dots, t_n \notin \text{dom}(T) \cup \{t\} \quad C = \text{Program}_1 \parallel \dots \parallel \text{Program}_n; C'}{(\mathcal{G}, \{(t, \mathcal{L}, C)\} \cup T) \rightarrow (\mathcal{G}, \{(t, \mathcal{L}, \text{join}(t_1); \dots; \text{join}(t_n); C')\} \cup T')} \text{ (PARCOMP)}
\end{array}$$

Fig. 3. Reference semantics (SC) for programming language of Figure 2

waits for all children threads to finish their execution. This is achieved by adding a **join**() command in the parent thread for each spawned thread. The rule for **join**(*tid*) command ensures that this command is executed when the thread corresponding to *tid* has finished its execution. This also ensures that the parent thread waits for the completion of children threads before continuing further. **fence** and **skip** are like no-op under SC semantics. Following the syntax of Figure 2 one process Proc_i , or thread, can only execute one program Program_i . Therefore we sometime use Proc_i and Program_i interchangeably to mean the same thing.

4 Logic

In the proof system of [Sou84] every process Proc_i executing a program Program_i has a history variable h_{Proc_i} which captures the interaction of this process with shared variables in terms of values read from and written to them. h_{Proc_i} is a sequence of elements of the form $(?\text{shvar}, \text{ph})$ or $(!\text{shvar}, \text{v})$. $(?\text{shvar}, \text{ph})$ is

added to the sequence when Proc_i reads a value from the shared variable shvar . Similarly, $(!\text{shvar}, v)$ is added to the sequence when Proc_i writes a value v to the shared variable shvar . Local reasoning of a program Program_i generates a triple of the form $\{P_i\} \text{Program}_i \{Q_i\}$ where P_i and Q_i define assertions on the *local state* of the process as well as on the *history* h_{Proc_i} . Rest of this section describes the axioms of this proof system explaining the idea of local reasoning in terms of history variable and the parallel composition rule in terms of **Compat** predicate.

Axioms In our programming language all program constructs, except GR and GW, operate on local expression and therefore do not require reading from or writing to shared variables. Therefore the proof rules for these constructs are same as the Hoare's axioms in sequential setting. In the following proof rules, the notation $P[Q/Q'][R/R']$ denote simultaneous substitution of Q' for Q and R' for R in P . Operator “.” concatenates an element to a sequence and ϵ is the empty sequence. Given a sequence σ , $|\sigma|$ is the length and $\sigma[i]$ is the i^{th} element of this sequence. The proof rule for the assignment to shared variable is as following,

$$\{P[\text{h}_{\text{Proc}_i}/\text{h}_{\text{Proc}_i}.(!\text{shvar}, \ell\text{exp})]\} \text{shvar}:=\ell\text{exp} \{P\} \quad (\text{GWrite})$$

As a result of this write the history is appended with the element $(!\text{shvar}, \ell\text{exp})$. The proof rule for the reading of a shared variable, $\ell\text{var}:=\text{shexp}_j$, is given as

$$\{\forall \mathbf{ph}. P[\text{h}_{\text{Proc}_i}/\text{h}_{\text{Proc}_i}.(?\text{shvar}_j, \mathbf{ph})][\ell\text{var}/\text{shexp}_j[\text{shvar}_j/\mathbf{ph}]]\} \ell\text{var}:=\text{shexp}_j \{P\} \quad (\text{GRead})$$

This rule requires the value of the shared variable shvar_j in order to evaluate the expression shexp_j but while reasoning locally we do not know the value beforehand. Therefore instead of the actual value of shvar_j a *placeholder variable* \mathbf{ph} is assigned to shvar_j and this information is stored in h_{Proc_i} by appending it with $(?\text{shvar}_j, \mathbf{ph})$. Further, shexp_j is evaluated accordingly before being assigned to ℓvar in the assertion. Here \mathbf{ph} is universally quantified to all possible values.

$$\frac{\{P_i \wedge \text{h}_{\text{Proc}_i} = \epsilon\} \text{Program}_i \{Q_i\}, i = 1 \dots n}{\{P_1 \wedge \dots \wedge P_n \wedge \text{shvar}_1 = v_1 \wedge \dots \wedge \text{shvar}_m = v_m\} \text{Program}_1 \parallel \dots \parallel \text{Program}_n} \quad (\text{PARCOMP})$$

$$\{Q_1 \wedge \dots \wedge Q_n \wedge \text{Compat}(v_1, \dots, v_m, \text{h}_{\text{Proc}_1}, \dots, \text{h}_{\text{Proc}_n})\}$$

In parallel composition, each process is analyzed in isolation with the initial value of its history variable h_{Proc_i} set to empty and some precondition P_i on its local state. This gives post-condition Q_i for each process Proc_i which also contains the assertions on h_{Proc_i} . Precondition of the parallel composition rule is the conjunctions of individual processes' preconditions and the initial values of shared variables shvar_1 to shvar_m . Post-condition of this rule is the conjunctions of individual processes' post-conditions along with the predicate **Compat** where **Compat** is defined in Figure 4. $\text{Merge}(\text{h}_{\text{Proc}_1}, \dots, \text{h}_{\text{Proc}_n})$ represent the set of all possible interleavings of histories h_{Proc_1} to h_{Proc_n} such that the sequence

$$\text{Compat}(v_1, \dots, v_m, \mathbf{h}_{\text{Proc}_1}, \dots, \mathbf{h}_{\text{Proc}_n}) \stackrel{\text{def}}{=} \begin{cases} \text{shvar}_1 = v_1 \wedge \dots \wedge \text{shvar}_m = v_m & \text{if } \mathbf{h}_{\text{Proc}_i} = \epsilon, i = 1 \dots n \\ \exists h \in \text{Merge}(\mathbf{h}_{\text{Proc}_1}, \dots, \mathbf{h}_{\text{Proc}_n}). & \text{otherwise} \\ \forall j \leq m. \text{shvar}_j = f_j(v_j, h) \\ \wedge \forall k \leq |h|. h[k] = (? \text{shvar}_j, \mathbf{ph}_j) \Rightarrow \\ \mathbf{ph}_j = f_j(v_j, h[1 : k - 1]), \end{cases}$$

Fig. 4. Non-recursive definition of *Compat* predicate

of elements within them is preserved in the merged history. Function $f_j(v, h)$ returns the last value written to the variable shvar_j in history h . It returns v if no such write is found. Essentially, the predicate *Compat* generates a set of equality predicates (one corresponding to each merged history). The first line in *Compat*'s definition denotes that the final value of any shared variable shvar_j is the last value written to shvar_j in that merged history. Second line relates the placeholder value \mathbf{ph}_j , corresponding to a read of a shared variable shvar_j , to the latest value written to shvar_j just before this element in the merged history. This is sufficient to characterize all compatible merged histories and therefore plays the central role in proofs of §6 and of Appendix ??.

Individual process histories contains placeholder variables for every read. In Figure 5 we define, rather informally, a set of predicates over these histories in order to succinctly represent them in our proofs. Given a sequence σ , $\sigma \downarrow_{\text{type}}$ denote the restricted subsequence of σ consisting of only *type* elements. Predicate **None!** holds if the history does not contain any write to any shared variable. **None!shvar** and **None?shvar** hold if the history does not contain any write to or read from the variable shvar . $[P]^*$ and $[P]^+$ capture the regularity of history sequence by abstracting the placeholder variables. We also admit $P^+ \Rightarrow P^*$ as a relaxation on the history sequence which is used in the consequence rule. We admit that the use of these predicates, without giving proper semantics, is not fully justified but we do it solely for the purpose of making our proofs manageable. We leave more formal treatment of these predicates for the future work.

5 Relaxed Memory Model

For the rest of this paper we consider the PSO memory model which allows reordering of a write instruction with future reads and future write instructions operating on different variables. To simulate the effect of PSO, every thread is equipped with one buffer per shared variable. These buffers store the values written on the corresponding variable by this thread in a queue(FIFO) discipline. Buffering the value of the write in a variable specific queue, simulates the effect of delaying the execution of a write instruction past future reads and future writes on different memory locations. If a read instruction for any shared variable shvar is executed in a thread then the local buffer of shvar is checked first. If this buffer

$$\begin{aligned}
\mathbf{None?shvar} &\stackrel{def}{=} \lambda elem, h. h \downarrow_{(!?shvar, _)} = \epsilon & \mathbf{None!} &\stackrel{def}{=} \lambda elem, h. h \downarrow_{(!_, _)} = \epsilon \\
\mathbf{None!shvar} &\stackrel{def}{=} \lambda elem, h. h \downarrow_{(!shvar, _)} = \epsilon & [P; Q] &\stackrel{def}{=} \lambda h. \exists h_0, h_1. h = h_0.h_1 \wedge P(h_0) \wedge Q(h_1) \\
[P]^* &\stackrel{def}{=} \lambda h. h = \epsilon \vee \exists h_0, h_1. h = h_0.h_1 \wedge P(h_0) \wedge [P]^*(h_1) \\
[P]^+ &\stackrel{def}{=} \lambda h. \exists h_0, h_1. h_0 \neq \epsilon \wedge h = h_0.h_1 \wedge P(h_0) \wedge [P]^*(h_1)
\end{aligned}$$

Fig. 5. Predicates on individual history variable h_i

is non empty then the latest written value (from the tail) is returned. In case of empty buffer the value is read from the global state. This memory model also provides an explicit **fence** instruction in order to restrict reordering of any two instructions within a thread. Operationally this is achieved by flushing all the buffers of that thread.

For relaxed semantics we need some modifications in the notion of State. A state or configuration under this memory model is of the form $(\mathcal{G}, \text{Tstore})$ where,

$$\begin{aligned}
\mathcal{G} &\stackrel{def}{=} \text{shvar} \rightarrow \text{val} & \text{Tstore} &\stackrel{def}{=} \text{Tid} \rightarrow \mathcal{L} \times \mathcal{B} \times \text{Program} \\
\mathcal{B} &\stackrel{def}{=} \text{shvar} \rightarrow \sigma & \mathcal{L} &\stackrel{def}{=} \ell\text{var} \rightarrow \text{val}
\end{aligned}$$

The only change with respect to SC state is in the definition of thread store. Here, the range of this function also contains a buffer store \mathcal{B} which is a function from shared variable to an ordered sequence of values, ranged over by σ . Function $\llbracket - \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} \in \text{exp} \rightarrow \mathcal{G} \rightarrow \mathcal{L} \rightarrow \mathcal{B} \rightarrow \text{val}$, defined in Figure 7, takes an expression and evaluates it based on the values stored in the global store, thread local store and buffer store. Further, relaxed semantics is defined in Figure 6. For the constructs not shown in Figure 6 the semantics is the same as in the SC semantics of Figure 3 except for the change in the evaluation function from $\llbracket - \rrbracket_{\mathcal{G}, \mathcal{L}}$ to $\llbracket - \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm}$. In relaxed semantics, a thread t executing a write to a shared variable shvar enqueues the value in the buffer of shvar in t . Any read of a shared variable shvar returns the latest value in the buffer of shvar , if any. If this buffer is empty then the read returns the value from the global state (memory). Flush operation non-deterministically dequeues an element from any thread buffer and updates the global state accordingly. Further, in the parallel composition rule the requirement for the parent thread's buffer being empty ensures that instructions before and after the parallel composition are ordered. Same holds for the **end** command as well.

6 Examples

We use our proof system to prove the correctness of Lamport's bakery algorithm [Lam74] for two processes and Simpsons's 4 slot algorithm [Sim90].

$\frac{C = \text{shvar} := \text{lexp}; C' \quad \mathcal{B}(\text{shvar}) = \sigma \quad \llbracket \text{lexp} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = v \quad \mathcal{B}' = \mathcal{B}[\text{shvar} := \sigma.v]}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}', C')\} \cup T)} \quad \text{(GW)}}$ $\frac{C = \text{lvar} := \text{lexp}; C' \quad \llbracket \text{lexp} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = v \quad \mathcal{L}' = \mathcal{L}[\text{lvar} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}', \mathcal{B}, C')\} \cup T)} \quad \text{(LRW)}}$ $\frac{C = \mathbf{join}(\text{lvar}); C' \quad \llbracket \text{lvar} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = t' \in \text{Tid} \quad t' \notin \text{dom}(T) \cup \{t\}}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C')\} \cup T)} \quad \text{(JOIN)}}$	$\frac{C = \text{lvar} := \text{shexp}; C' \quad \llbracket \text{shexp} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = v \quad \mathcal{L}' = \mathcal{L}[\text{lvar} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}', \mathcal{B}, C')\} \cup T)} \quad \text{(GR)}}$ $\frac{C = \mathbf{end} \quad \forall \text{shvar} \in \text{dom}(\mathcal{B}). \mathcal{B}(\text{shvar}) = \epsilon}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, T)} \quad \text{(END)}}$ $\frac{\exists \text{shvar} \in \text{dom}(\mathcal{B}). \mathcal{B}(\text{shvar}) = v.\sigma \quad \mathcal{B}' = \mathcal{B}[\text{shvar} := \sigma] \quad \mathcal{G}' = \mathcal{G}[\text{shvar} := v]}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}', \{(t, \mathcal{L}, \mathcal{B}', C')\} \cup T)} \quad \text{(FLUSH)}}$ $\frac{C = \mathbf{fence}; C' \quad \forall \text{shvar} \in \text{dom}(\mathcal{B}). \mathcal{B}(\text{shvar}) = \epsilon}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C')\} \cup T)} \quad \text{(FENCE)}}$
$T' = T \cup \{\{(t_1, \emptyset, \text{Program}_1)\}, \dots, \{(t_n, \emptyset, \text{Program}_n)\}\}$ $t_1, \dots, t_n \notin \text{dom}(T) \cup \{t\}$ $\frac{C = \text{Program}_1 \parallel \dots \parallel \text{Program}_n; C' \quad \forall \text{shvar} \in \text{dom}(\mathcal{B}). \mathcal{B}(\text{shvar}) = \epsilon}{(\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, C)\} \cup T) \xrightarrow{M} (\mathcal{G}, \{(t, \mathcal{L}, \mathcal{B}, \mathbf{join}(t_1); \dots; \mathbf{join}(t_n); C')\} \cup T')} \quad \text{(PARCOMP)}$	

Fig. 6. Relaxed semantics for programming language of Figure 2

$$\llbracket \text{shvar} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} \stackrel{def}{=} \begin{cases} v & \text{if } \mathcal{B}(\text{shvar}) = \sigma.v \\ \mathcal{G}(\text{shvar}) & \text{otherwise} \end{cases}$$

$$\llbracket \text{lvar} \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = \mathcal{L}(\text{lvar}) \quad \llbracket e_1 \oplus e_2 \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} = \llbracket e_1 \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm} \oplus \llbracket e_2 \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm}$$

Fig. 7. $\llbracket - \rrbracket_{\mathcal{G}, \mathcal{L}, \mathcal{B}}^{rm}$ for relaxed semantics

- Lamport’s algorithm has unbounded data domain for token variables which makes its verification challenging for model checking based approaches. We prove that this algorithm satisfies the mutual exclusion property, i.e. it is never possible for both processes to be inside their critical section simultaneously.
- Simpson’s 4 slot algorithm implements a wait-free and lock-free atomic register for concurrent reader and writer. This algorithm uses disjoint slots to read from and write to in presence of interference. We prove that this algorithm is safe in the sense that concurrent reader and writer never use the same slot in presence of interference. Further, we also prove that the values observed by successive reads are in the same order as written by the writer.

One important notation used in our proofs is as following; Let P and Q be the assertions about individual elements in a history sequence then $P \prec Q$ denotes

the fact that the element satisfying the assertion P appears before the element satisfying the assertion Q in the history sequence.

6.1 Example: Lamport's Bakery Algorithm for Two Processes

$$\begin{array}{l}
 \text{Inv1} \stackrel{\text{def}}{=} \lambda h. \\
 \left(\text{Let } ph_1, ph_2, ph_3, ph_4, \right. \\
 \quad P_1, Q_1, R_1, T_1, U_1, V_1, W_1. \text{ in} \\
 \quad P_1 = \lambda h. (!\text{token}_1, 0)(h) \text{ in} \\
 \quad Q_1 = \lambda h. (!\text{taking}_1, \text{true})(h) \text{ in} \\
 \quad R_1 = \lambda h. (?token_2, ph_1)(h) \text{ in} \\
 \quad T_1 = \lambda h. (!\text{token}_1, ph_1 + 1)(h) \text{ in} \\
 \quad U_1 = \lambda h. (!\text{taking}_1, \text{false})(h) \text{ in} \\
 \quad V_1 = \lambda h. (?taking_2, ph_2)(h) \text{ in} \\
 \quad W_1 = \lambda h. (?token_1, ph_3)(h) \text{ in} \\
 \quad X_1 = \lambda h. (?token_2, ph_4)(h) \text{ in} \\
 \quad [[Q_1; R_1; T_1; U_1; \mathbf{None!}; P_1]^*; Q_1; R_1; T_1; \\
 \quad \quad U_1; \mathbf{None!}; V_1; \mathbf{None!}; W_1; X_1](h) \left. \right)
 \end{array}
 \quad
 \begin{array}{l}
 \text{Inv2} \stackrel{\text{def}}{=} \lambda h. \\
 \left(\text{Let } ph'_1, ph'_2, ph'_3, ph'_4, \right. \\
 \quad P_1, Q_2, R_2, T_2, U_2, V_2, W_2. \text{ in} \\
 \quad P_2 = \lambda h. (!\text{token}_2, 0)(h) \text{ in} \\
 \quad Q_2 = \lambda h. (!\text{taking}_2, \text{true})(h) \text{ in} \\
 \quad R_2 = \lambda h. (?token_1, ph'_1)(h) \text{ in} \\
 \quad T_2 = \lambda h. (!\text{token}_2, ph'_1 + 1)(h) \text{ in} \\
 \quad U_2 = \lambda h. (!\text{taking}_2, \text{false})(h) \text{ in} \\
 \quad V_2 = \lambda h. (?taking_1, ph'_2)(h) \text{ in} \\
 \quad W_2 = \lambda h. (?token_1, ph'_3)(h) \text{ in} \\
 \quad X_2 = \lambda h. (?token_2, ph'_4)(h) \text{ in} \\
 \quad [[Q_2; R_2; T_2; U_2; \mathbf{None!}; P_2]^*; Q_2; R_2; T_2; \\
 \quad \quad U_2; \mathbf{None!}; V_2; \mathbf{None!}; W_2; X_2](h) \left. \right)
 \end{array}$$

Fig. 8. Invariants $Inv1$ and $Inv2$ of Figure 9

In Lamport's algorithm each process Proc_i operates on shared variables $token_i$ and $taking_i$ of type integer and boolean respectively. When a process Proc_i intends to enter the critical section, it first reads the value of $token$ corresponding to another process, say v , and assigns the value $v + 1$ to its own $token$ variable. $ftok_1$ and $ftok_2$ are local variables of Proc_1 which hold the value of $token_1$ and $token_2$ respectively. Similarly, $stok_1$ and $stok_2$ are local variables of Proc_2 for $token_1$ and $token_2$. $(a, b) < (a', b')$ denotes lexicographic less than relation, i.e. $(ftok_2, 2) < (ftok_1, 1)$ iff $ftok_2 < ftok_1$ and $(stok_1, 1) < (stok_2, 2)$ iff $stok_1 \leq stok_2$. This algorithm with inline assertions is shown in Figure 9 where $Inv1$ and $Inv2$ are as in Figure 8. Assertions are on the history h_i and local variables of that process. History h_i is abstracted using the predicates of Figure 5. It should be noted that V_1, W_1 and X_1 do not appear explicitly inside the regular structure of the history abstracted by $[Q_1; R_1; T_1; U_1; \mathbf{None!}; P_1]^*$. They appear in the last iteration of the loop and therefore the variables updated inside the loop, $(ftok_1, ftok_2)$, are assigned the placeholders corresponding to these reads, i.e. $\mathbf{ph}_2, \mathbf{ph}_3$ and \mathbf{ph}_4 . Same holds for the invariant of Proc_2 as well. Subsequently, these elements are abstracted to $\mathbf{None!}$ in order to establish the loop invariant.

Mutual Exclusion proof In order to prove the mutual exclusion property, we first state the required assertion to capture this property.

$$ME \stackrel{\text{def}}{=} (Inv1''(h_1) \wedge Inv2''(h_2) \wedge \text{Compat}(0, 0, \text{false}, \text{false}, h_1, h_2) = \text{false})$$

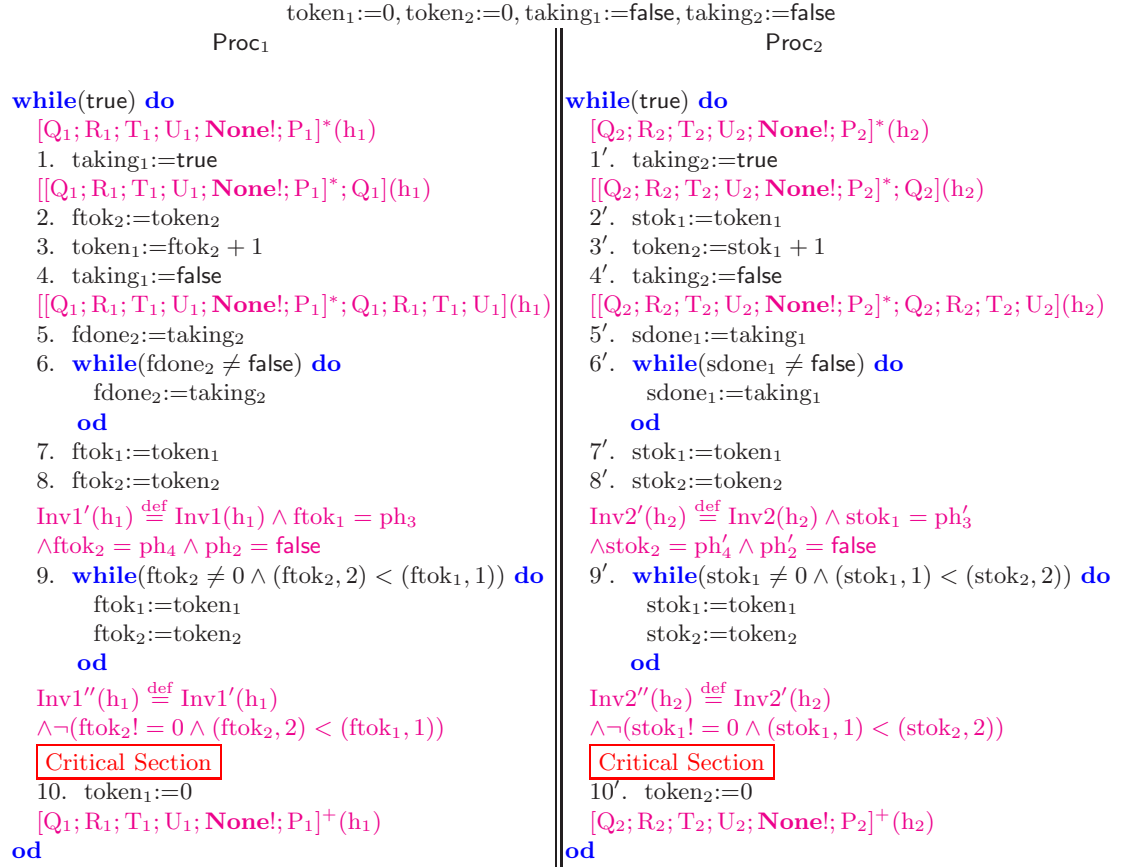


Fig. 9. Lamport's Bakery Algorithm for Two Processes

where $\text{Inv1}''(h_1)$ and $\text{Inv2}''(h_2)$ are the assertions inside critical sections of Proc₁ and Proc₂ respectively. We prove it in two steps. First we show that,

$$\text{Inv1}'(h_1) \wedge \text{Inv2}'(h_2) \wedge \text{Compat}(0, 0, \text{false}, \text{false}, h_1, h_2) \implies \text{Inter.}$$

$$\text{Inter} \stackrel{\text{def}}{=} \left(\begin{array}{l} \text{Inter1} \stackrel{\text{def}}{=} (\text{ftok}_2 = 0 \implies \text{stok}_1 \neq 0 \wedge \text{stok}_1 < \text{stok}_2) \\ \wedge \text{Inter2} \stackrel{\text{def}}{=} (\text{stok}_1 = 0 \implies \text{ftok}_2 \neq 0 \wedge \text{ftok}_2 < \text{ftok}_1) \\ \wedge \text{Inter3} \stackrel{\text{def}}{=} (\text{ftok}_2 \neq 0 \wedge \text{stok}_1 \neq 0 \implies \\ \text{ftok}_1 \leq \text{ftok}_2 \implies \text{stok}_1 \leq \text{stok}_2) \end{array} \right)$$

and then it is easy to show that,

$$\begin{aligned} & \text{Inter} \wedge \neg(\text{ftok}_2 \neq 0 \wedge (\text{ftok}_2, 2) < (\text{ftok}_1, 1)) \\ & \wedge \neg(\text{stok}_1 \neq 0 \wedge (\text{stok}_1, 1) < (\text{stok}_2, 2)) = \text{false} \end{aligned}$$

Proof of $Inv1'(h_1) \wedge Inv2'(h_2) \wedge Compat(0, 0, false, false, h_1, h_2) \implies Inter1$, We show that in two steps,

$$Inv1'(h_1) \wedge Inv2'(h_2) \wedge Compat(0, 0, false, false, h_1, h_2) \wedge ftok_2 = 0 \implies stok_1 \neq 0 \quad (1)$$

and

$$Inv1'(h_1) \wedge Inv2'(h_2) \wedge Compat(0, 0, false, false, h_1, h_2) \wedge ftok_2 = 0 \implies stok_1 < stok_2 \quad (2)$$

Proof of (1) , First assume that $Inv1'(h_1), Inv2'(h_2), Compat(0, 0, false, false, h_1, h_2)$ and $ftok_2 = 0$ hold. Only way to have $ftok_2 = ph_4 = 0$ is to put last read of $token_2$ in h_1 (denoted by X_1) in the merged history after P_2 of, say $k - 1^{th}$ iteration of $[Q_2; R_2; T_2; U_2; \mathbf{None!}; P_2]$ and before T_2 of k^{th} iteration. $Inv1$ implies that $\underline{T_1} \prec X_1$ hence the value of $token_1$ visible at X_1 is non-zero which also becomes visible at T_2 because of the placement of X_1 before T_2 and the fact that the history h_{Proc_1} does not contain any write to $token_1$ after X_1 . Further because $Inv2$ implies $\underline{T_2} \prec W_2$ therefore the read of $token_1$ at W_2 in $Proc_2$ also observes this non-zero value of $token_1$ and assigns it to $stok_1$. Therefore we have,

$$Inv1(h_1) \wedge Inv2(h_2) \wedge Compat(0, 0, false, false, h_1, h_2) \wedge ftok_2 = 0 \implies stok_1 \neq 0$$

Out of all the orderings of $Proc_1$ and $Proc_2$ only $T_1 \prec X_1$ and $T_2 \prec W_2$ are used to prove this part of the proof. Hence these two are *sufficient* to prove (1).

Proof of (2) In order to have $ftok_2 = ph_4 = 0$, X_1 should be placed in the merged history after P_2 , of say $k - 1^{th}$ iteration of $[Q_2; R_2; T_2; U_2; \mathbf{None!}; P_2]$ and before T_2 in k^{th} iteration. Further, $Inv1'$ implies $ph_2 = false$ and therefore V_1 (corresponding to the read of $taking_2$ in last iteration) must be placed before Q_2 of any n^{th} iteration and after U_2 of $n - 1^{th}$ iteration such that $n \leq k^{th}$. It must be noticed that V_1 cannot be put after U_2 of k^{th} iteration because $\underline{V_1} \prec X_1$ in the history of $Proc_1$. $Inv1$ implies $\underline{T_1} \prec V_1$ and hence the value of $token_1$ visible at V_1 is non-zero, say v . As V_1 has been placed before Q_2 of n^{th} iteration, where $n \leq k$, hence the same value v of $token_1$ is also visible at Q_2 of n^{th} iteration. $Inv2$ implies that $\underline{Q_2} \prec R_2$ hence the same value v of $token_1$ is also visible at R_2 of any subsequent iterations. $Inv2$ implies $\underline{R_2} \prec T_2$ and therefore all subsequent iterations of T_2 write $v + 1$ to $token_2$ resulting in $stok_2 = v + 1$. Further the value visible at $stok_1$ in $Proc_2$ is still the last value written to $token_1$ by $Proc_1$, i.e. v . Therefore we get,

$$Inv1'(h_1) \wedge Inv2'(h_2) \wedge Compat(0, 0, false, false, h_1, h_2) \wedge ftok_2 = 0 \implies stok_1 < stok_2$$

Only orderings used in this part of the proof are $V_1 \prec X_1, T_1 \prec V_1, R_2 \prec T_2$ and $Q_2 \prec R_2$. Hence, out of all total orders in h_1 and h_2 these are *sufficient* to prove (2).

Proof of $Inv1' \wedge Inv2' \wedge Compat(0, 0, false, false, h_1, h_2) \implies Inter2$, This is symmetric to previous proof and gives us following symmetric *sufficient orderings*; $T_2 \prec X_2, T_1 \prec W_1, V_2 \prec X_2, T_2 \prec V_2, Q_1 \prec R_1$ and $R_1 \prec T_1$.

Proof of $Inv1' \wedge Inv2' \wedge Compat(0, 0, false, false, h_1, h_2) \implies Inter3$, For $ftok_2 \neq 0$, X_1 must read the non-zero value written to $token_2$ at T_2 and similarly for $stok_1 \neq 0$, W_2 must read the non-zero value written to $token_1$ at T_1 . Let X_1 read from T_2 of iteration k_2 and W_2 reads from T_1 of iteration k_1 . Following possibilities arise based on whether or not k_1 and k_2 are last iterations of $Proc_1$ and $Proc_2$.

k_1 is not the last iteration and k_2 is the last iteration In order to have $stok_1 \neq 0$, W_2 is placed after T_1 of k_1^{th} iteration and before P_1 of k_1^{th} iteration in the merged history. $Inv2$ implies that $T_2 \prec W_2$ and therefore the value written to $token_2$ in the last iteration of $Proc_2$ at T_2 is some v such that $v \neq 0$ and it flows to W_2 . $Inv1$ implies $P_1 \prec X_1$ and because $Proc_1$ does not write to $token_2$ hence X_1 also sees the value of $token_2$ as $v \neq 0$. $Inv1$ further implies that $P_1 \prec R_1$ for R_1 of any iteration greater than k_1 and $R_1 \prec T_1$ such that R_1 reads the value of $token_2$ and writes back this value incremented by 1 to $token_1$ at T_1 . Therefore $v + 1$ is written to $token_1$ at T_1 in all iterations greater than k_1 . Further, $T_1 \prec W_1$ implies that the same value $v + 1$ is also visible at W_1 . Therefore we get $ftok_1 > ftok_2$ implying $Inter3$ trivially holds.

k_1 is the last iteration and k_2 is not the last iteration In order to have $ftok_2 \neq 0$, X_1 is placed after T_2 of k_2 and before P_2 of k_2 in the merged history. $Inv1$ implies $T_1 \prec X_1$ and therefore the value written to $token_1$ in the last iteration of $Proc_1$ at T_1 is some v such that $v \neq 0$ and it flows to X_1 . $Inv2$ implies $P_2 \prec R_2$ for R_2 of any iteration greater than k_2 and $R_2 \prec T_2$ such that R_2 reads the value of $token_1$ and writes back this value incremented by 1 to $token_2$ at T_2 . Therefore $v + 1$ is written to $token_2$ at T_2 in all iteration greater than k_2 . Also $Inv2$ implies $T_2 \prec X_2$ which gives $stok_2$ equal to $v + 1$. Further $Inv2$ also implies $P_2 \prec W_2$ hence the same value v of $token_1$ which is visible at P_2 is assigned to $stok_1$. This results in $stok_1 < stok_2$ and hence proved.

Both k_1 and k_2 are last iterations : In this case X_1 is placed after T_2 of the last iteration and because $T_2 \prec X_2$ hence $ftok_2 = stok_2$. Similarly, if W_2 is placed after T_1 of the last iteration then from $T_1 \prec W_1$ in $Inv1$ we have $stok_1 = stok_2$. Therefore $ftok_1 \leq ftok_2 \implies stok_1 \leq stok_2$ hence proved.

Neither of k_1 and k_2 are last iterations : We show that if $ftok_2$ reads the value of $token_2$ from k_2^{th} iteration of $Proc_2$ then it is not possible for $stok_1$ to read the value of $token_1$ from the iteration k_1 of $Proc_1$ which is not the last iteration. Let X_1 is placed after T_2 and before P_2 of k_2^{th} iteration. $T_1 \prec X_1$ implies that the value of $token_1$ visible at X_1 is from the last iteration of T_1 which also becomes visible at P_2 of k_2^{th} iteration because of the placement of X_1 . Further, $P_2 \prec W_2$ implies that W_2 sees the same value of $token_1$ written by the last iteration of $Proc_1$ at T_1 which

is not k_1 . Similar argument follows for W_2 as well. Hence no compatible merged history exists for this case.

Finally we collect the *sufficient* orderings used to prove *Inter3*.

- $T_1 \prec X_1, T_1 \prec W_1, P_1 \prec X_1, P_1 \prec R_1$ and $R_1 \prec T_1$ for Proc_1 .
- $T_2 \prec X_2, T_2 \prec W_2, P_2 \prec W_2, P_2 \prec R_2$ and $R_2 \prec T_2$ for Proc_2 .

In $P_1 \prec R_1$ and $P_2 \prec R_2$, R_i comes from the iteration later than that of P_i .

Lamport's bakery algorithm under PSO memory model PSO memory model allows write instructions in a process to be reordered with future write and read instructions operating on different addresses. We have following *sufficient* instruction orderings needed to prove *Inter* and hence mutual exclusion.

- $T_1 \prec V_1, T_1 \prec W_1, T_1 \prec X_1, P_1 \prec X_1, V_1 \prec X_1, Q_1 \prec R_1, R_1 \prec T_1$
- $T_2 \prec V_2, T_2 \prec X_2, T_2 \prec W_2, P_2 \prec W_2, V_2 \prec X_2, Q_2 \prec R_2, R_2 \prec T_2$
- $P_1 \prec R_1$ if P_1 is from iteration k then R_1 is from iteration greater than k .
- $P_2 \prec R_2$ if P_2 is from iteration k then R_2 is from iteration greater than k .

The PSO memory model preserves the ordering of any two instructions which are data or control dependent. Therefore $T_1 \prec W_1, T_2 \prec X_2, R_1 \prec T_1$ and $R_2 \prec T_2$ are also satisfied by PSO. Further, PSO also preserves the order of two read instructions, i.e. $V_1 \prec X_1$ and $V_2 \prec X_2$. A fence between T_1 and V_1 also satisfies the ordering $T_1 \prec X_1$ and symmetrically a fence between T_2 and V_2 also satisfies the ordering $T_2 \prec W_2$. Further, a fence between Q_1 and R_1 also orders P_1 of k^{th} iteration before R_1 of $\geq k + 1^{\text{th}}$ iterations and X_1 . A fence between Q_2 and R_2 also orders P_2 of k^{th} iteration before R_2 of $\geq k + 1^{\text{th}}$ iteration and W_2 . Therefore we only need two fence instructions per process, i.e. between Q_1 and R_1 and between T_1 and V_1 in Proc_1 and symmetrically in Proc_2 .

6.2 Example: Simpson's 4 slot algorithm [Sim90]

This is a wait-free algorithm for concurrent access of a location from a single reader and a single writer processes. This location is simulated using a 2×2 array variable slot. If the reader is reading the data and the writer wants to write new data at the same time then instead of waiting for the reader to complete, the writer writes to a different index of slot and indicates the reader to read from this location in the subsequent read. Boolean variables *reading* and *latest* represent two indices (*false* as 0 and *true* as 1) to denote the row and column indices of slot and *index* variable. Variable *index* is a two element boolean array such that for any $s \in \{\text{true}, \text{false}\}$, $\text{slot}[s][\text{index}[s]]$ has the latest data written by the writer in the row $\text{slot}[s]$. Variables *fwp* and *findex* are local to the writer process. Variables *srp* and *srindex* are local to the reader process. The algorithm with inline assertions on history and local variables are shown in Figure 10. In order to simulate different invocations of the writer and the reader the respective program is enclosed within the loop. We are interested in proving following two properties of this algorithm.

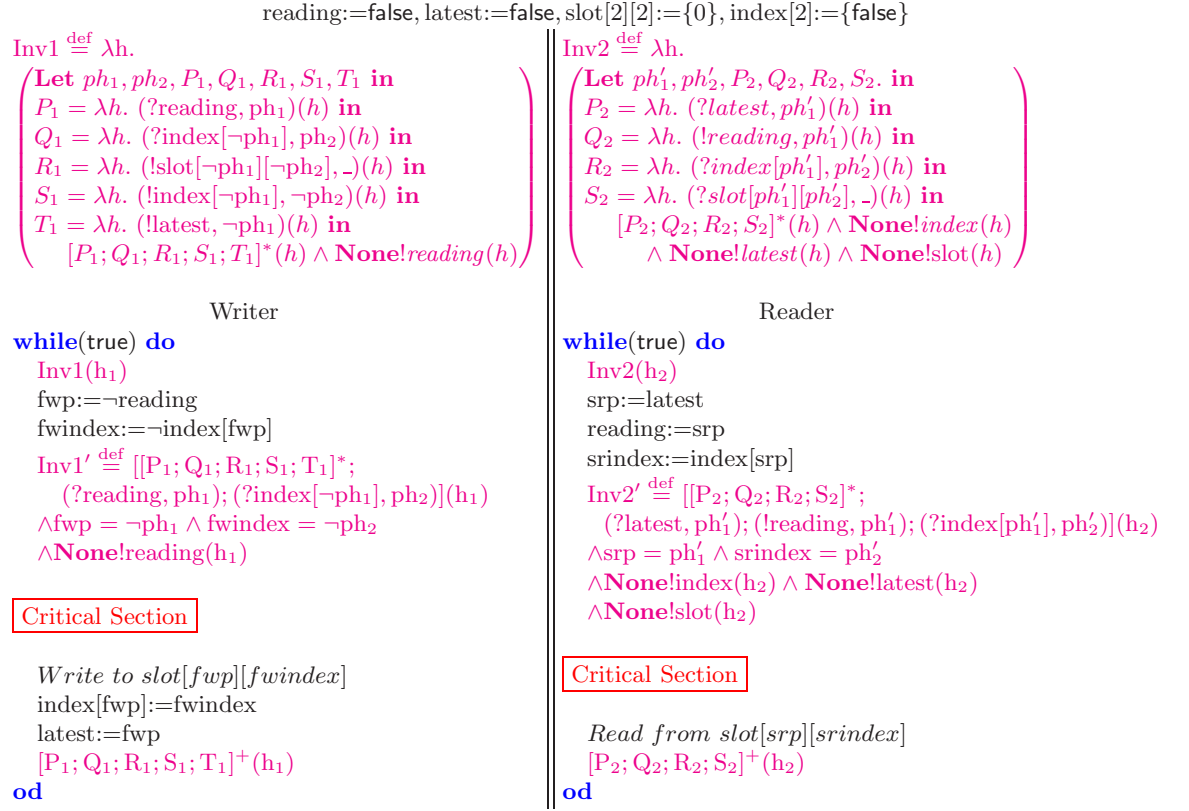


Fig. 10. Simpson's 4 slot algorithm

Interference Freedom We want to show that at the entry point of critical sections (for the writer and the reader) $fwp \neq srp$, i.e. the reader and the writer use different rows of the slot variable, and $fwp = srp \Rightarrow fwindex \neq srindex$, i.e. if both use the same row of the slot variable then they read from and write to different column of that row. Therefore, we want to prove

$$\text{Inv1}'(h_1) \wedge \text{Inv2}'(h_2) \wedge \text{Compat}(\text{false}, \text{false}, \{0\}, \{\text{false}\}, h_1, h_2) \implies fwp \neq srp \vee fwp = srp \Rightarrow fwindex \neq srindex$$

Where $\text{Inv1}'$ and $\text{Inv2}'$ are the assertions just before the program point where writer is going to write the data and reader is going to read the data.

Proof. In any compatible merged history h of h_1 and h_2 the placement of the last write $(!reading, ph'_1)$ of h_2 has two choices with respect to the last read $(?reading, ph_1)$ of h_1 .

- Last write $(!reading, ph'_1)$ of h_2 is placed before the last read $(?reading, ph_1)$ of h_1 : As writer does not write to *reading* hence $ph_1 = ph'_1$, or $\neg fwp = srp$ (from assertions $fwp = \neg ph_1$ and $srp = ph'_1$) and therefore $fwp \neq srp$. Hence proved.

- *Last write* ($!reading, ph'_1$) of h_2 is placed after the last read ($?reading, ph_1$) of h_1 : This, along with the assumption $fwp = srp$ implies $\neg ph_1 = ph'_1$. Therefore in $Inv2'$, $(?index[ph'_1], ph'_2)$ is same as $(?index[\neg ph_1], ph'_2)$. According to $Inv1'$ $(?index[\neg ph_1], ph_2)$ is in h_1 . We want to establish the relation between ph_2 and ph'_2 .

$Inv1'$ implies that $S_1 \prec (?reading, ph_1)$ hence there is no write to variable $index$ beyond $(?reading, ph_1)$ in the merged history. Hence the value at $index[\neg ph_1]$ is same for both processes, i.e. $ph_2 = ph'_2$. From $Inv1'$ and $Inv2'$ we get $fwindex = \neg ph_2$ and $srindex = ph_2$ which implies $fwindex \neq srindex$. Hence proved.

From the above proof, we can see that the only ordering important in proving this property is $S_1 \prec P_1$ where P_1 is from later iteration than that of S_1 . Now we prove another property of interest and find out the program orderings used in that proof.

Consistent Reads Second property of interest is related to the order of reads.

It specifies that the values read by the reader form a stuttering sequence of values written by the writer, i.e. if the writer writes the sequence 1,2,3,4,5 in subsequent invocations of write then the reader cannot observe 1,4,3,5 as a sequence read. It must observe the sequence which preserve the order of writes and possibly interspersed with the repetition of the same data. First, we define some notations used in this section. Let $MergedHist(Reader^R, Writer^W)$ be the set of all compatible merged histories consisting of R invocations of the reader process and W invocations of the writer process. Let $Reader(n)$ and $Writer(n)$ be the n^{th} invocations of the reader and the writer respectively. Let D^k be the data written by the writer in the k^{th} invocation. Let $D(w)$ be a sequence $D^1.D^2 \dots .D^w$ of values written by w consecutive iterations of the writer. For $s \in \{\text{true}, \text{false}\}$, \bar{s} denote the negation of s . Let $elem_{Reader^r}$ be the element $elem \in \{(?-, _), (!-, _)\}$ in the merged history from r^{th} invocation of the Reader. Similarly $elem_{Writer^w}$ denote the same for for the w^{th} iteration of the Writer.

Stuttering sequence Let $S_{r,w}$ be a sequence of length r , constructed from the elements of $D(w)$. $S_{r,w}$ is a stuttering sequence of $D(w)$ if for any index i of the sequence $S_{r,w}$ such the $S_{r,w}[i - 1] = D^{k_1}$ and $S_{r,w}[i] = D^{k_2}$ then $k_1 \leq k_2$.

Some interesting properties of the Reader and the Writer processes

Only the writer writes to *latest* and reads from *reading* variable. Further, only the reader writes to *reading* and reads from *latest*. Also, the value written to *reading* by the reader in any invocation is same as the value read from *latest*. The value written to *latest* by the writer in any invocation is negation of the value that it reads from *reading*.

Following lemma characterizes the sequence of values written to *reading* in a segment of the merged history. This characterization is then used in the proof of Lemma 2.

Lemma 1. For all $R, W, h \in \text{MergedHist}(\text{Reader}^R, \text{Writer}^W)$, $r \leq R, w \leq W$, $s \in \{\text{true}, \text{false}\}$, if $\text{Reader}(r)$ reads the value of *latest* written by $\text{Writer}(w)$ as s then in the sequence of values written to variable *reading* between P_1 of $\text{Writer}(w)$ and P_2 of $\text{Reader}(r)$, s is never followed by \bar{s} .

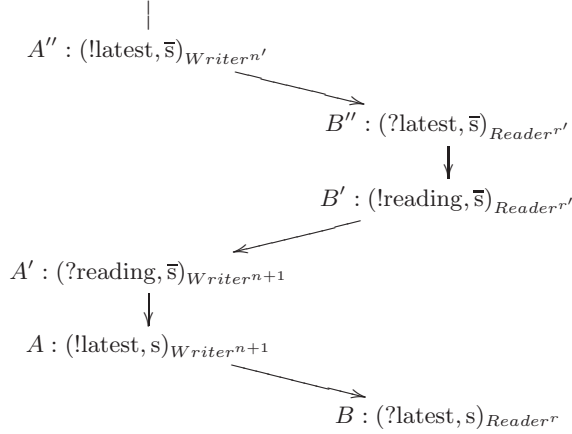


Fig. 11. Merged history for Lemma 1

Proof. We prove it using induction on the iteration number of the writer process.

Base case, $w = 0$: If $\text{Reader}(r)$ reads the initial value of *latest* (in 0^{th} iteration of the writer process), say s , then all the invocations of the reader before $\text{Reader}(r)$ also see this initial value of *latest* as s and therefore the sequence is made of only this value. Hence the base case satisfies this property.

Induction Hypothesis, $w \leq n$: For all $w \leq n$, if $\text{Reader}(r)$ reads the value of *latest* as s , written by $\text{Writer}(w)$ then the sequence of values written to *reading* between P_1 of $\text{Writer}(w)$ and P_2 of $\text{Reader}(r)$ satisfies this property.

Induction Step, $w = n + 1$: Consider the merged history of Figure 11 where $\text{Reader}(r)$ reads the value of *latest* (denoted by B) from $\text{Writer}(n + 1)$ (denoted by A). We want to prove this property for the sequence of values written to *reading* between A' and B where A' denotes P_1 of $\text{Writer}(n + 1)$ in Figure 11. $\overline{P_1} \prec \overline{T_1}$ implies that A' appears before A in the merged history. Let $\text{Writer}(n + 1)$ read the value of *reading* from $\text{Reader}(r')$ (denoted by B'). $\overline{P_2} \prec \overline{Q_2}$ implies that P_2 of $\text{Reader}(r')$ appears before B' in the merged history. Let $\text{Reader}(r')$ at P_2 read the value of *latest* from $\text{Writer}(n')$ (A''). It is clear that $n' < n + 1$ hence from the induction hypothesis we know that in the sequence of values written to *reading* between A'' and B'' , \bar{s} is never followed by s . We use this knowledge to characterize the values written to *latest* between B'' and A' . From the writer process we know that the

value written to *latest* is negation of the value read from *reading* variable. Therefore in the sequence of values written to *latest* between B'' and A' , s is never followed by \bar{s} . Further, we also know that the reader process writes the same value to *reading* as is read from the variable *latest*. Therefore in the sequence of values written to *reading* between A' and B , s is never followed by \bar{s} . Hence proved.

For any reader we establish the relation between its read of variable *latest* and the read of data. More formally we want to say that,

Lemma 2. *For all $R, W, h \in \text{MergedHist}(\text{Reader}^R, \text{Writer}^W)$, $r \leq R, w \leq W$, $s \in \{\text{true}, \text{false}\}$, if $\text{Reader}(r)$ reads the value of *latest* as s written by $\text{Writer}(w)$ and reads the value of $\text{index}[s]$ written by $\text{Writer}(w')$ then $w' \geq w$ and $\text{Reader}(r)$ reads the data $D^{w'}$ and all the invocations of the writer from w to w' write the data in the row s of the slot variable.*

Proof. Let us assume that $\text{Reader}(r)$ reads the value of *latest* as s written by $\text{Writer}(w)$ which means that P_2 of $\text{Reader}(r)$ appears after T_1 of $\text{Writer}(w)$ and no write to *latest* appears in between these two points in the merged history. As $\text{Writer}(w)$ also writes to $\text{index}[s]$ and $\underline{S_1} \prec \underline{T_1}$ and $\underline{P_2} \prec \underline{R_2}$, hence $\text{Reader}(r)$ reads the value of $\text{index}[s]$ either from $\text{Writer}(w)$ or from $\text{Writer}(w')$ such that $w' \geq w$. We prove the following two properties,

- **Reader(r) reads the data written by $\text{Writer}(w')$ in slot $[s][k]$ where k is the value written to $\text{index}[s]$ by $\text{Writer}(w')$**

Proof: If $\text{Reader}(r)$ reads $\text{index}[s]$ as $k \in \{\text{true}, \text{false}\}$ from $\text{Writer}(w')$ then $\underline{R_1} \prec \underline{S_1}$ implies that $\text{Writer}(w')$ has also written the data in slot $[s][k]$.

We want to show that no subsequent invocation of the writer writes in slot $[s][k]$ before S_2 of $\text{Reader}(r)$. From the assumption that R_2 of $\text{Reader}(r)$ reads the value of $\text{index}[s]$ from $\text{Writer}(w')$ implies that there is no write to $\text{index}[s]$ between S_1 of $\text{Writer}(w')$ and R_2 of $\text{Reader}(r)$. $\underline{S_1} \prec \underline{P_1}$, where P_1 is from later iterations than that of S_1 , in $\text{Inv}1'$ implies that the writer can be invoked at most once after the iteration w' and before R_2 of $\text{Reader}(r)$. If invoked more than once it results in the write of $\text{index}[s]$ to appear after S_1 of $\text{Writer}(w')$ and before R_2 of $\text{Reader}(r)$, contradicting our assumption. Further, if the next invocation after w' happens then it writes the data to column \bar{k} of row s in slot variable still satisfying the property. If any further invocation of the writer happens after R_2 and before S_2 of $\text{Reader}(r)$ then because of $\underline{Q_2} \prec \underline{R_2}$ it observes the value of *reading* as s and therefore writes the data to \bar{s} row of the slot variable. $\text{Inv}2'$ implies that $\underline{S_2}$ of $\text{Reader}(r) \prec \underline{Q_2}$ of subsequent invocations of the reader and therefore no write to *reading* exists between R_2 and S_2 of $\text{Reader}(r)$. This results in observing the same value of *reading*, s , and subsequently writing the data to row \bar{s} by all invocations of the writer between R_2 and S_2 of $\text{Reader}(r)$.

- **All the invocations of the writer from w to w' write the data in the row s of the slot variable**

Proof: We prove an alternate equivalent property; All invocations of

the writer from w to w' read the value of *reading* as \bar{s} . This follows from the property that the writer writes in that row of the slot variable that is obtained by negating the value of the variable *reading*. From the assumption, $\text{Writer}(w')$ writes to $\text{index}[s]$ and therefore it also reads the value of *reading* as \bar{s} and the same holds for $\text{Writer}(w)$ as well. We need to show that this property holds for the rest of the invocations in between w and w' . We prove it by contradiction by assuming that there exists a w'' such that $w < w'' < w'$ and P_1 of $\text{Writer}(w'')$ reads the value of *reading* as s . It is clear that P_1 of $\text{Writer}(w'')$ appears after P_1 of $\text{Writer}(w)$ and before P_1 of $\text{Writer}(w')$. From the earlier argument we know that the value of *reading* visible at P_1 of $\text{Writer}(w)$ is \bar{s} . Hence, P_1 of $\text{Writer}(w'')$ cannot read from the value of *reading* visible at P_1 of $\text{Writer}(w)$. Therefore, it must read the value of *reading* as s from the sequence of values written to *reading* between P_1 of $\text{Writer}(w)$ and P_2 of $\text{Reader}(r)$. Following Lemma 1, s can never be followed by \bar{s} in the sequence of values written to *reading* in between P_1 of $\text{Writer}(w)$ and P_2 of $\text{Reader}(r)$. It further implies that P_1 of $\text{Writer}(w')$ cannot read the value of *reading* as \bar{s} , a contradiction to our assumption. Therefore all invocations of the writer from w to w' read the value of *reading* as \bar{s} . Hence proved.

Now we use Lemma 2 to prove the following theorem.

Theorem 1 (Stuttering Sequence). *Stutter(n) $\stackrel{def}{=} \text{For all } n, w \in \mathbb{N}, h \in \text{MergedHist}(\text{Reader}^n, \text{Writer}^w) \text{ the sequence } S_{n,w}, \text{ constructed from the elements of } D(w), \text{ is a stuttering sequence of } D(w).$*

Proof. Base case, $n = 0$: With no history corresponding to the Reader in the merged history, the empty sequence trivially forms a stuttering sequence.

Induction Hypothesis: For all $r \leq n$ $\text{Stutter}(r)$ holds true.

Induction Step, $r = n + 1$:

Let $\text{Reader}(n)$ read the value of *latest* from $\text{Writer}(w_a)$. From Lemma 2, we know that $\text{Reader}(n)$ reads the value $D^{w'}$ such that $w_a \leq w' \leq w$ and all the invocations of the writer from w_a to w' write the data in the same row s of the slot variable. Further, the value of $\text{index}[s]$ visible at R_2 of $\text{Reader}(n)$ is from S_1 of $\text{Writer}(w')$. We know that the write to *latest* from consecutive iterations are totally ordered and the same holds for consecutive reads from *latest* as well. Therefore, $\text{Reader}(n + 1)$ reads the value of *latest* from some $\text{Writer}(w_b)$ such that $w_b \geq w_a$. There are two possibilities based on whether this value is s or \bar{s} .

- $\text{Reader}(n + 1)$ reads the value of *latest* as s from the $\text{Writer}(w_b)$ such that $w_b \geq w_a$: From our assumption we know that $\text{Reader}(n)$ sees the value of $\text{index}[s]$ from $\text{Writer}(w')$ therefore the value of $\text{index}[s]$ visible at R_2 of $\text{Reader}(n + 1)$ will be from some w'' such that $w \geq w'' \geq w'$. Following Lemma 2, the data read by $\text{Reader}(n + 1)$ from $\text{slot}[s][\text{index}[s]]$ will be from $\text{Writer}(w'')$ and $w'' \geq w'$ implies that the resulting sequence $S_{n+1,w}$ is still a stuttering sequence.

- Reader($n + 1$) reads the value of *latest* as \bar{s} from Writer(w_b) such that $w_b \geq w_a$: From Lemma 2, we know that all the invocations of the writer from w_a to w' write the data in the same row s of slot and because Writer(w_b) writes the data in row \bar{s} of slot therefore $w_b > w'$. Following Lemma 2, Reader($n + 1$) reads the data from some Writer(w'') such that $w'' \geq w_b$. Combining these two we get $w'' > w'$ such that Reader(n) reads $D^{w'}$ and Reader($n + 1$) reads $D^{w''}$. Therefore the resulting sequence $S_{n+1,s}$ is still a stuttering sequence.

Simpson’s 4 slot algorithm under PSO memory model Following per-thread instruction orderings are used in the proofs of the interference freedom and the consistent reads properties.

- $P_1 \prec T_1$ (from the proof of Lemma 1), $S_1 \prec T_1$, $R_1 \prec S_1$
- $P_2 \prec Q_2$ (from the proof of Lemma 1), $P_2 \prec R_2$, $Q_2 \prec R_2$
- $S_1 \prec P_1$, where P_1 is from iteration later than that of S_1
- $S_2 \prec Q_2$, where Q_2 is from iteration later than that of S_2 .

Out of all these orderings, $P_1 \prec T_1$, $P_2 \prec Q_2$ and $P_2 \prec R_2$ are data dependent orders which are respected by the PSO memory model. $S_2 \prec Q_2$ where Q_2 is from iteration later than that of S_2 is also respected by PSO memory model because S_2 corresponds to read and Q_2 corresponds to write instruction. Therefore, we have to enforce only $R_1 \prec S_1$, $S_1 \prec T_1$, $Q_2 \prec R_2$ and $S_1 \prec P_1$ where P_1 is from iteration later than that of S_1 . Following the semantics of **fence** it is sufficient to put two fence instructions in the writer; one between R_1 and S_1 and another between S_1 and T_1 . Further, we need one fence instruction between Q_2 and R_2 in the reader as well.

7 Conclusion and Future Work

In this paper we proved Simpson’s 4 slot algorithm correct under the SC memory model with respect to the interference freedom and the consistent reads properties. Based on these proofs, we identified the locations of the **fence** instructions needed to satisfy these two properties under the PSO memory model. As a direction for future work we still have to explore the use of this approach for advanced memory models which support non-atomic writes (POWER/ARM). This paper introduces the predicates over history variable only to carry out proofs conveniently. No formal treatment is given to them and this should be addressed with high priority. Even in presence of predicates over history variables, the difficulty in carrying out these proofs without any tool support is evident from the proof of Simpson’s 4 slot algorithm. We plan to use proof assistants for this in near future. In all the examples we considered here, a program is always executed by only one thread. This restriction needs to be addressed in order to handle concurrent data structures where many threads can execute the same method of an object.

References

- [AAC⁺12a] Parosh Aziz Abdulla, Mohamed Faouzi Atig, Yu-Fang Chen, Carl Leonardsson, and Ahmed Rezine. Automatic fence insertion in integer programs via predicate abstraction. In *SAS*, pages 164–180, 2012.
- [AAC⁺12b] Parosh Aziz Abdulla, Mohamed Faouzi Atig, Yu-Fang Chen, Carl Leonardsson, Ahmed Rezine, and Ahmed Rezine. Counter-example guided fence insertion under tso. In *TACAS*, pages 204–219, 2012.
- [ABBM10] Mohamed Faouzi Atig, Ahmed Bouajjani, Sebastian Burckhardt, and Madanlal Musuvathi. On the verification problem for weak memory models. *SIGPLAN Not.*, 45(1):7–18, January 2010.
- [ABBM12] Mohamed Faouzi Atig, Ahmed Bouajjani, Sebastian Burckhardt, and Madanlal Musuvathi. What’s decidable about weak memory models? In *ESOP*, pages 26–46, 2012.
- [BD12] Richard Bornat and Mike Dodds. Abducing memory barriers. *Draft, April*, 2012.
- [Bor12] Richard Bornat. Barrier logic: a program logic for concurrency on powerpc. 2012.
- [HR07] Thuan Quang Huynh and Abhik Roychoudhury. Memory model sensitive bytecode verification. *Form. Methods Syst. Des.*, 31(3):281–305, December 2007.
- [Jon83] C. B. Jones. Specification and design of (parallel) programs. In *Proceedings of IFIP’83*, pages 321–332. North-Holland, 1983.
- [KVY11] Michael Kuperstein, Martin Vechev, and Eran Yahav. Partial-coherence abstractions for relaxed memory models. In *Proceedings of the 32nd ACM SIGPLAN conference on Programming language design and implementation, PLDI ’11*, pages 187–198, New York, NY, USA, 2011. ACM.
- [Lam74] Leslie Lamport. A new solution of dijkstra’s concurrent programming problem. *Commun. ACM*, 17(8):453–455, August 1974.
- [LW11] Alexander Linden and Pierre Wolper. A verification-based approach to memory fence insertion in relaxed memory systems. In *Proceedings of the 18th international SPIN conference on Model checking software*, pages 144–160, Berlin, Heidelberg, 2011. Springer-Verlag.
- [O’H07] P.W. O’Hearn. Resources, concurrency, and local reasoning. *Theoretical Computer Science*, 375(1):271–307, 2007.
- [Rid10] Tom Ridge. A rely-guarantee proof system for x86-tso. In *Proceedings of the Third international conference on Verified software: theories, tools, experiments, VSTTE’10*, pages 55–70, Berlin, Heidelberg, 2010. Springer-Verlag.
- [Sim90] H.R. Simpson. Four-slot fully asynchronous communication mechanism. *Computers and Digital Techniques, IEE Proceedings E*, 137(1):17 – 30, jan 1990.
- [Sou84] N. Soundararajan. A proof technique for parallel programs. *Theoretical Computer Science*, 31(1–2):13 – 29, 1984.
- [VP07] V. Vafeiadis and M. Parkinson. A marriage of rely/guarantee and separation logic. In *CONCUR 2007*, pages 256–271. Springer, 2007.